


PREMIER SANITARY HOUSING

PFSH - 5 ROUND - 2" PORTS

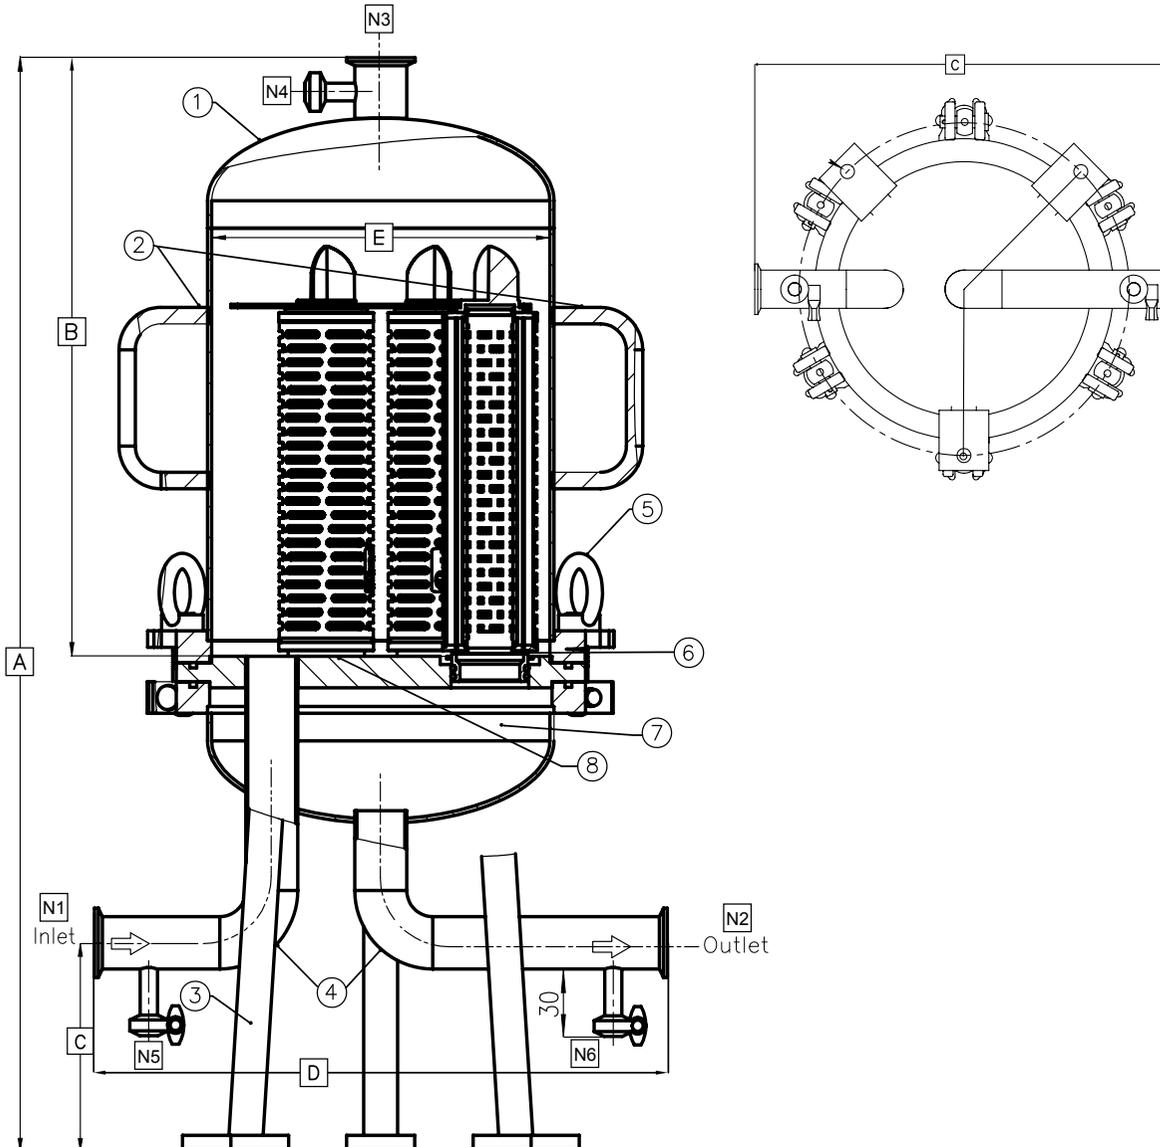

Overall Dimensions						
Part Number	To Accommodate Filter Qty x Length	A mm	B mm	C mm	D mm	E mm
PSFH-SEP-5-30-2	5 x 30"	1280	940	420	150	254
PSFH-SEP-5-40-2	5 x 40"	1530	1190	420	150	254

Port Details					
No.	Type	Size	No.	Type	Size
N1	Inlet	2" Tri-Clamp	N4	Drain	½" Tri-Clamp
N2	Outlet	2" Tri-Clamp	N5	Gauge Port	1½" Tri-Clamp
N3	Drain	½" Tri-Clamp	N6	Vent	½" Tri-Clamp

Components					
No.	Name	Material	No.	Name	Material
1	Housing Body	316L	7	Housing Base	316L
2	Handle	304	8	226 Cartridge Locator Plate	316L
3	Legs- fixed (3 Round =3 5&7 Round =4)	304	Not Shown	Glycerine Filled Diaphragm Gauge, 11 bar, 1.5" Tri-Clover	316L
4	Inlet/Outlet Pipe	316L	Not Shown	Tri-Clamps (x3)- for Vent & Drains	304
5	Swingbolt Assembly	304	Not Shown	Blanking Plates (x3)- for Vent & Drains	316L
6	O-Ring	EPDM			

Technical Information	Design Temperature	150°C
	Design Pressure	10 bar
	Hydrostatic Test Pressure	12.5 bar

- Pressure relief device should be installed on the outer piping by the customer to assure that pressure in the vessel can not exceed the design pressure indicated
- Vent and Drain ports come with blanking plates and Tri-Clamps
- All dimensions are approximate in mm