
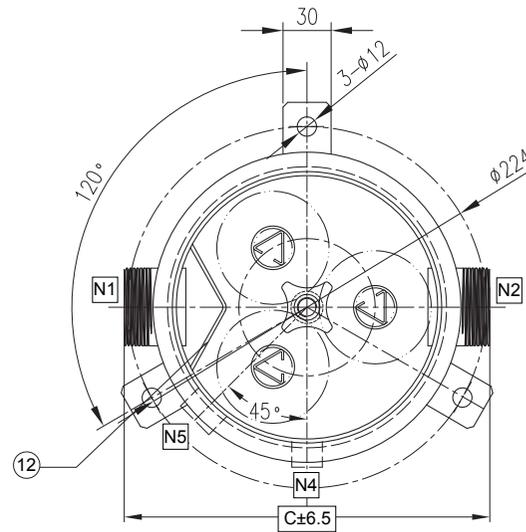


# INOX STANDARD FILTER HOUSING

## SFH-SGB-3

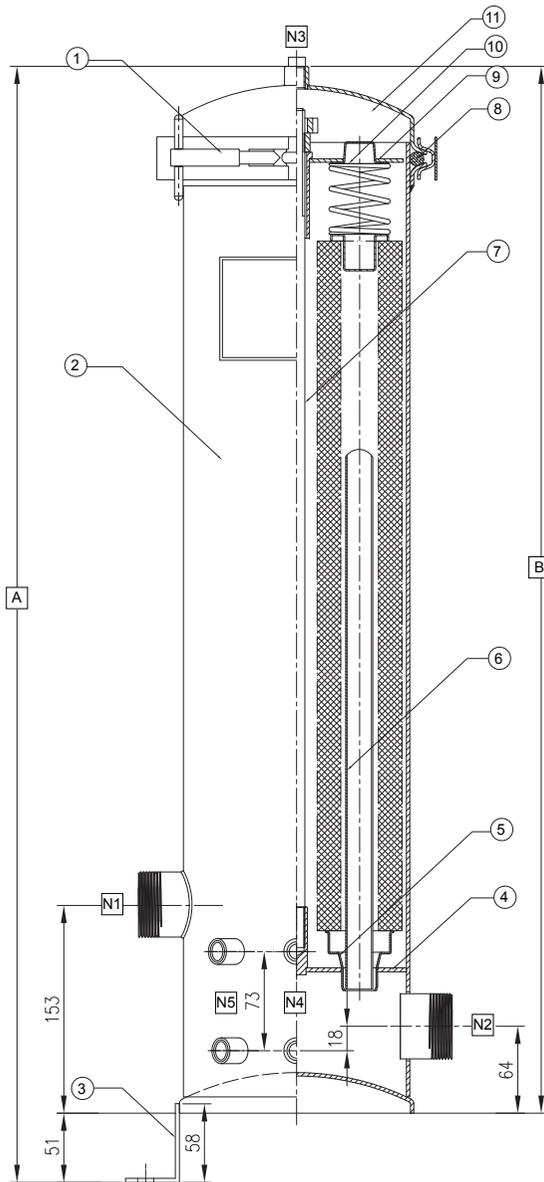

Overall Dimensions			
To Accommodate Filter Qty x Length	A mm	B mm	C mm
3 x 10"	568	517	237
3 x 20"	822	771	237
3 x 30"	1076	1025	237
3 x 40"	1330	1279	237

Port Details					
No.	Type	Size	No.	Type	Size
N1	Inlet	2" BSPT-M	N4	Gauge (x2)	1/4" BSPT-F
N2	Outlet	2" BSPT-M	N5	Drain (x2)	1/2" BSPT-F
N3	Vent	1/4" BSPT-F			

Components					
No.	Name	Material	No.	Name	Material
1	V-Clamp	304	7	M12 Tie Rod	316L
2	Body	316L	8	O-Ring	BUNA-N
3	Legs (x3)	304	9	Hold Down Plate	316L
4	Tube Sheet	316L	10	Spring Assembly(x4)	316L
5	Cartridge Seat(x4)	316L	11	Head	316L
6	V Post (x4)	316L	12	Buffer	316L

Technical Information	Maximum Operating Temperature	121°C
<ul style="list-style-type: none"> <li>Pressure relief device should be installed on the outer piping by the customer to assure that pressure in the vessel can not exceed the design pressure indicated</li> <li>Vent and gauge ports are fitted with 316L PTFE taped plugs</li> <li>All dimensions are approximate in mm</li> </ul>	Design Pressure	10 bar
	Hydrostatic Test Pressure	13 bar