


INOX STANDARD FILTER HOUSING

SFH-SGB-5

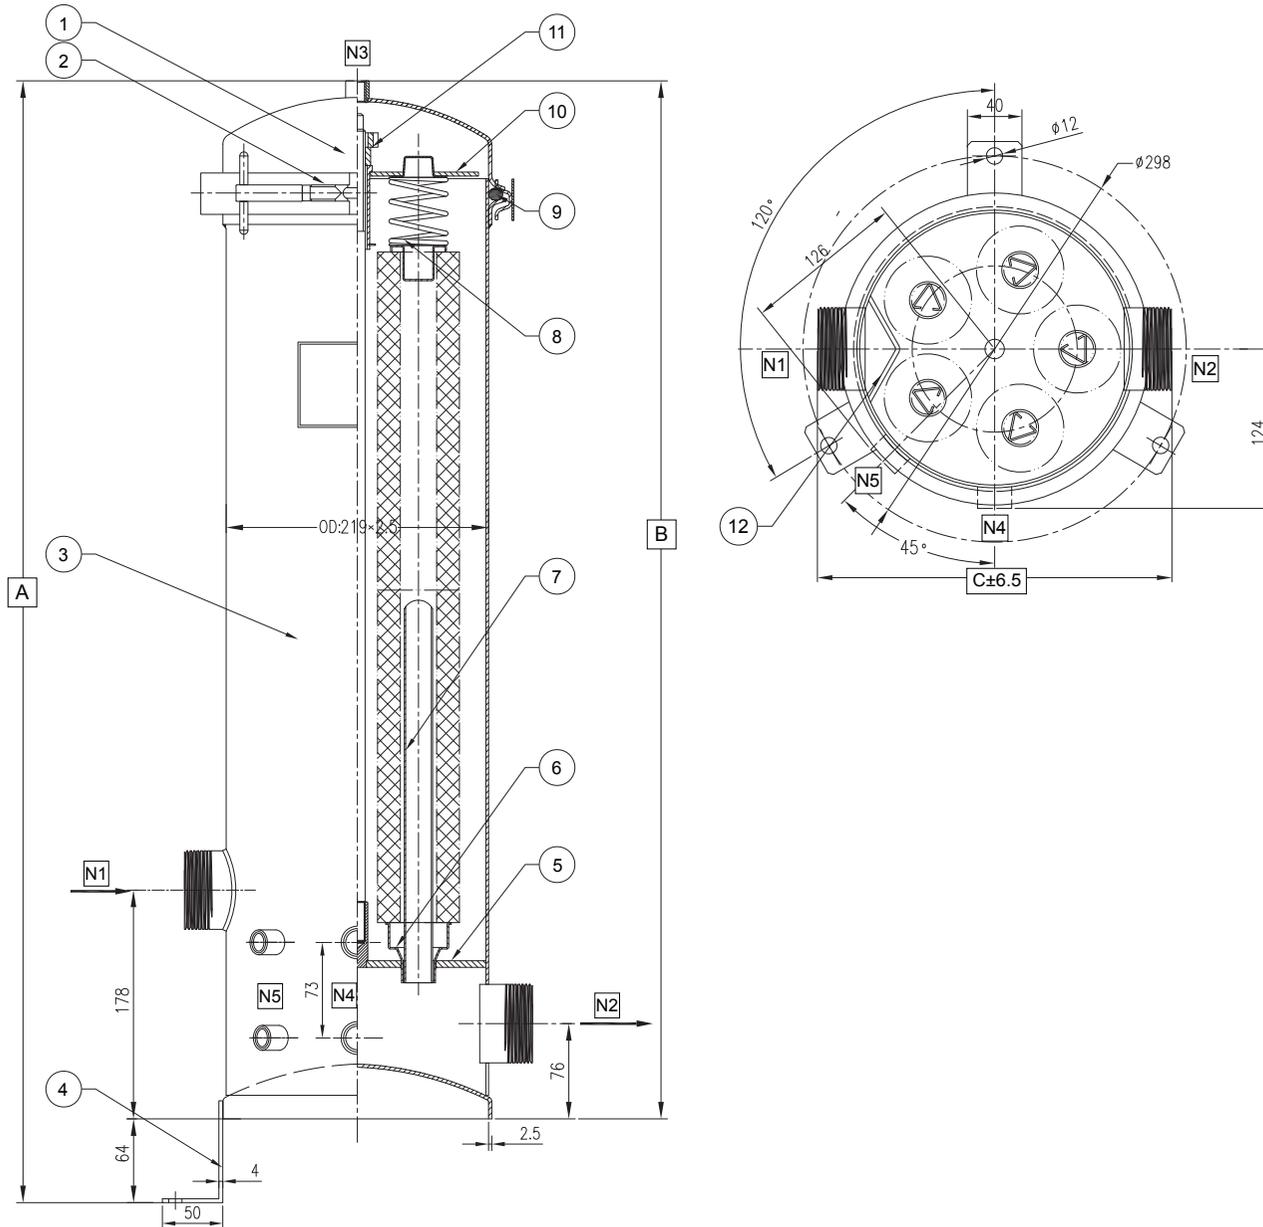

Overall Dimensions			
To Accommodate Filter Qty x Length	A mm	B mm	C mm
5 x 20"	857	793	285
5 x 30"	1111	1047	285
5 x 40"	1365	1301	285

Port Details					
No.	Type	Size	No.	Type	Size
N1	Inlet	2" BSPT-M	N4	Gauge (x2)	1/4" BSPT-F
N2	Outlet	2" BSPT-M	N5	Drain (x2)	1/2" BSPT-F
N3	Vent	1/4" BSPT-F			

Components					
No.	Name	Material	No.	Name	Material
1	Head	316L	7	V Post (x5)	316L
2	V-Clamp	304	8	Spring Assembly(x5)	316L
3	Body	316L	9	O-Ring	BUNA-N
4	Legs (x3)	304	10	Hold Down Plate	316L
5	Tube Sheet	316L	11	M12 Tie Rod	316L
6	Cartridge Seat (x5)	316L	12	Buffer	316L

Technical Information	Maximum Operating Temperature	121°C
<ul style="list-style-type: none"> Pressure relief device should be installed on the outer piping by the customer to assure that pressure in the vessel can not exceed the design pressure indicated Vent and gauge ports are fitted with 316L PTFE taped plugs All dimensions are approximate in mm 	Design Pressure	10 bar
	Hydrostatic Test Pressure	13 bar