

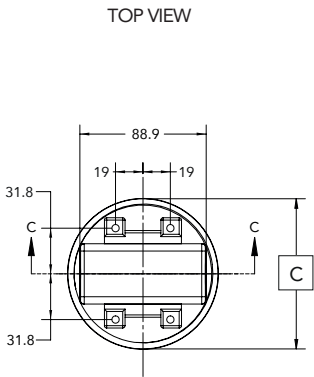



INOX FILTER HOUSING  
PFH-SBR-226

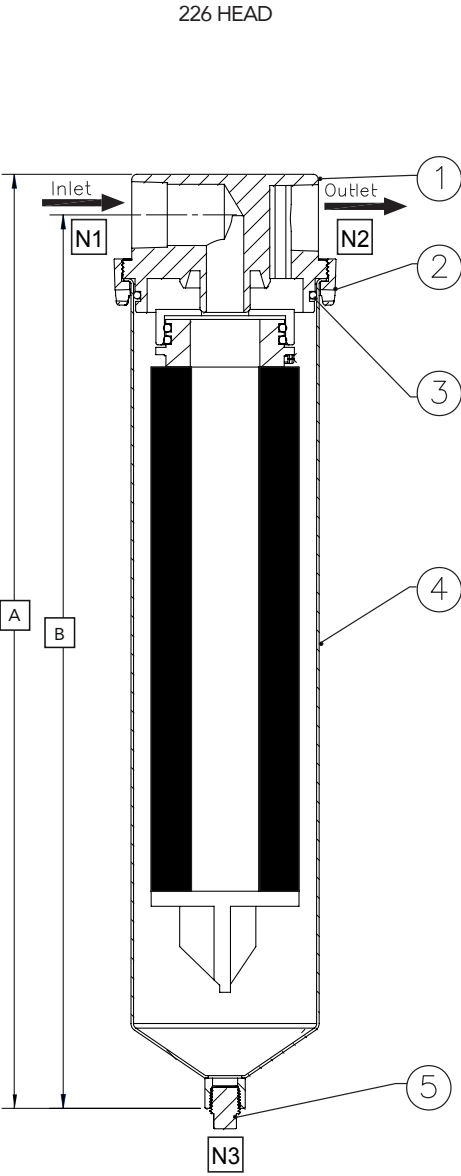

TOP VIEW WITH  
BRACKET ATTACHED



MOUNTING BRACKETS

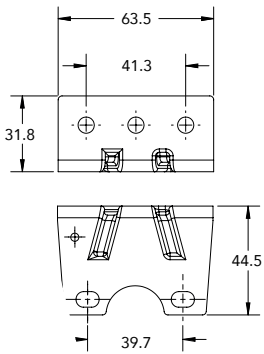

CLOSURE TOOL



| Dimensions   |                                    |      |      |      |
|--------------|------------------------------------|------|------|------|
| Product Code | To Accommodate Filter Qty x Length | A mm | B mm | C mm |
| PFH-SBR-10   | 1 x 10"                            | 443  | 421  | 105  |
| PFH-SBR-20   | 1 x 20"                            | 697  | 675  | 105  |
| PFH-SBR-30   | 1 x 30"                            | 951  | 929  | 105  |

| Port Details |        |                 |
|--------------|--------|-----------------|
| No.          | Type   | Size            |
| N1           | Inlet  | 3/4", 1" BSPT-F |
| N2           | Outlet | 3/4", 1" BSPT-F |
| N3           | Drain  | 1/4" FNPT       |

| Components |                  |                     |     |            |          |
|------------|------------------|---------------------|-----|------------|----------|
| No.        | Name             | Material            | No. | Name       | Material |
| 1          | Head             | 316L                | 4   | Body       | 316L     |
| 2          | Ring Nut Closure | Nickel Plated Brass | 5   | Drain Plug | 316L     |
| 3          | Seal             | BUNA-N              |     |            |          |

| Technical Information | Maximum Operating Temperature | 93°C   |
|-----------------------|-------------------------------|--------|
|                       | Design Pressure               | 21 bar |

• Drain Port comes fitted with PTFE wrapped 316L plug.

• All dimensions are approximate.